




Petrotherm

3901 East La Palma Avenue
Anaheim, CA 92807 - USA
Tel: 714.630.4656
petrotherm@earthlink.net

"Quality Oilfield Heating Equipment Since 1959"

PRODUCT DATA SHEET

Flow Through Heater Skid FHS

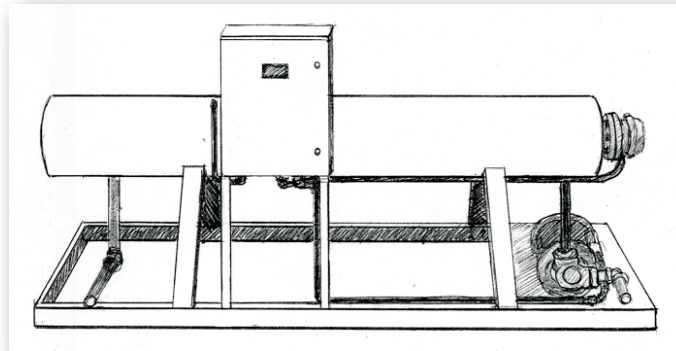

GENERAL

Petrotherm Electric Heater Skids provide efficient heating of supply fuel for oil-fired equipment such as heater treaters, steam generators, etc. They are sized for proper heating and pumping rates depending on application. AWT units utilize the "time-tested" Petrotherm Heater Log thus allowing quick, inexpensive replacement of individual heater elements if required.

The system consists of skid-mounted heater assembly, temperature control, on-off power contactor or optional proportional power control, circuit breaker and control power transformer.

PRODUCT DATA (standard units) Higher powers with extra length

MODEL	ELECTRICAL DATA					DIMENSIONS		
NO	POWER	VOLTS	AMPS	PHASE	BTU/HR	WIDTH	LENGTH	HEIGHT
FHS-10	10KW	480	12.5	3	34,000	3'	8'	5'
FHS-20	20KW	480	25	3	68,000	3'	8'	5'

ADVANTAGES

- Low cost
- Efficient — 100% of produced heat goes into fluid flow.
- Low maintenance costs.
- Long life.
- Skid-mounted — self-contained.

OPTIONS

- Complete fluid pumping system including pump, motor, motor starter control and pressure regulation.
- Higher KW ratings to 90KW on special order.